


BOBINA PER FILI METALLICI E PER SALDATURA DIN 8559

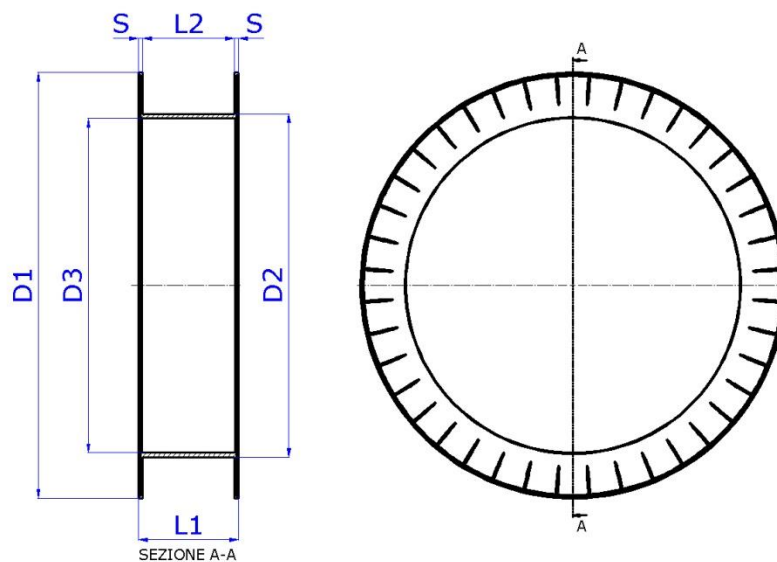


Dimensioni in mm

TIPO	COD.	D1	D2	D3	L1	L2	S
BOBINA Ø382	R141	382	308	300	90	82	4

Rev.	Data
2	11/10/23

BOBINA

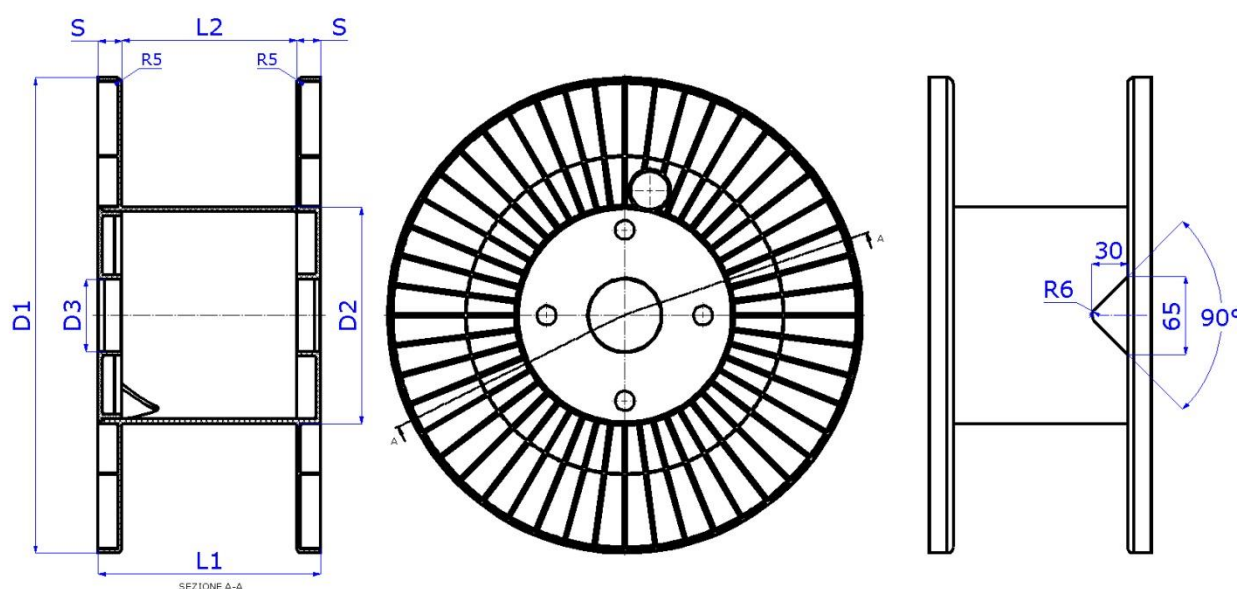


Dimensioni in mm

TIPO	COD.	D1	D2	D3	L1	L2	S
BOBINA	R449	395	180	60	185	145	20

Rev.	Data
2	11/10/23

BOBINA PER CAVI ELETTRICI

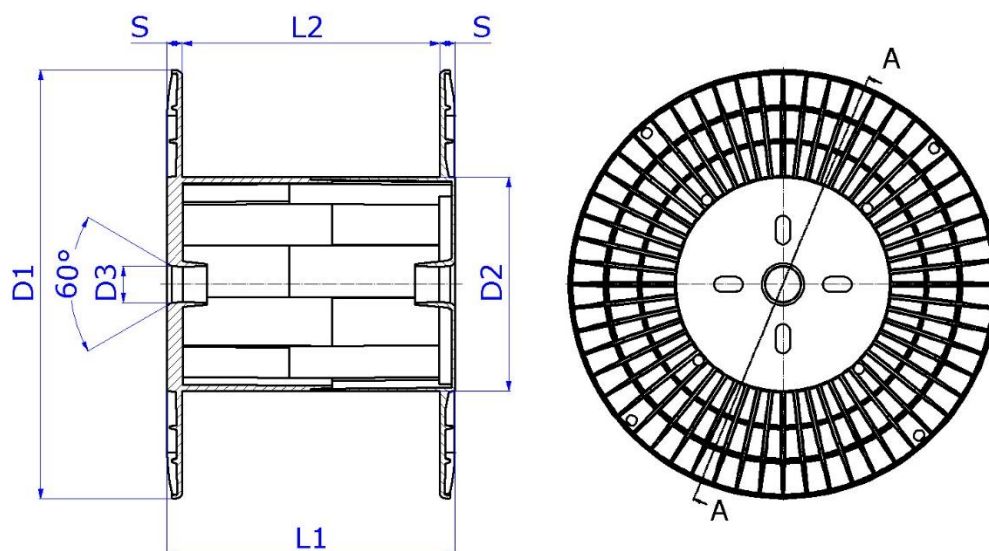


Dimensioni in mm

TIPO	COD.	D1	D2	D3	L1	L2	S
BOBINA 400	R295	400	200	26 ^{+0.3}	264	240	12

Rev.	Data
1	03/04/20

BOBINA

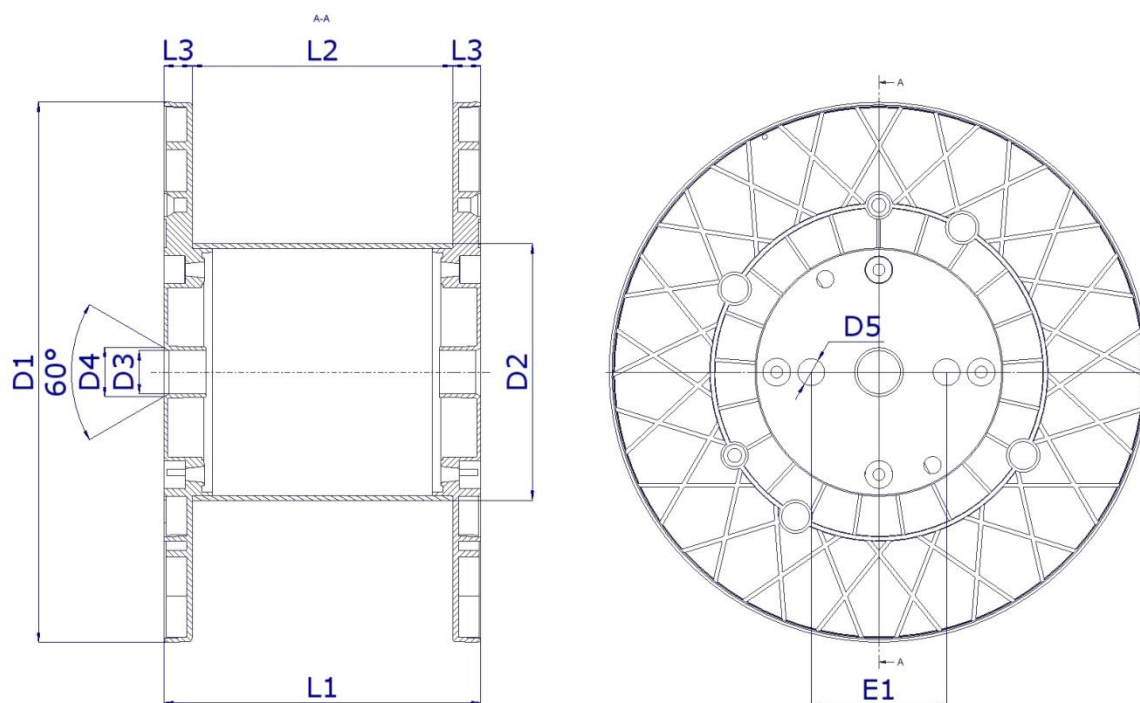


Dimensioni in mm

TIPO	COD.	D1	D2	D3	D4	D5	E1	L1	L2	L3
BOBINA	R360	400	200	32	36	20	100	234	193	20,5

Rev.	Data
1	03/04/20

BOBINA PER CAVI ELETTRICI

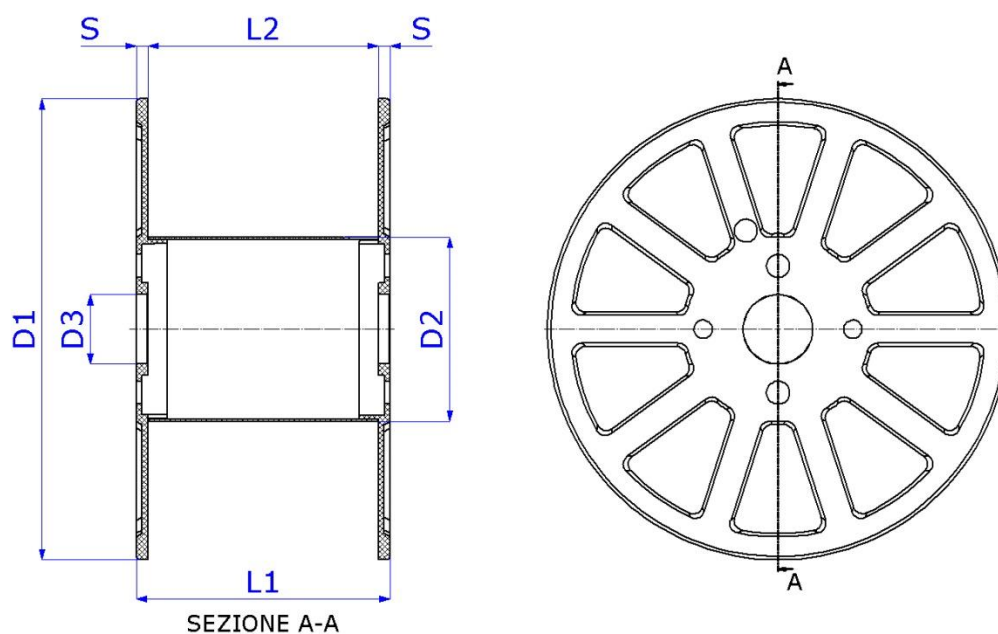


Dimensioni in mm

TIPO	COD.	D1	D2	D3	L1	L2	S
BOBINA	R384	400	125	32	100	80	10
BOBINA	R355	400	125	32	170	150	10
BOBINA	R354	400	160	42	320	300	10
BOBINA	R450	400	160	60	220	200	10
BOBINA	R402	400	160	80	320	300	10

Rev.	Data
2	11/10/23

BOBINA PER CAVI ELETTRICI

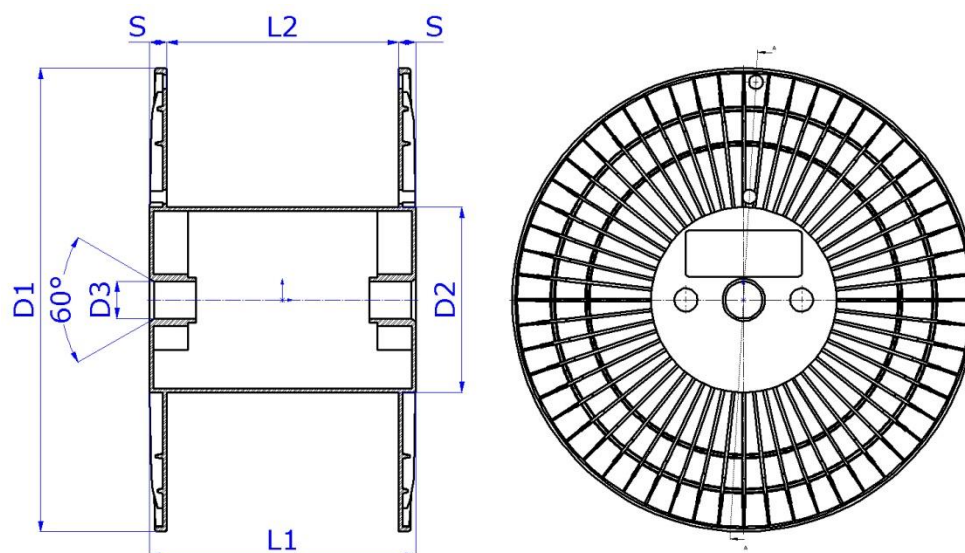


Dimensioni in mm

TIPO	COD.	D1	D2	D3	L1	L2	S
BOBINA 400	R156	400	200	32 ^{+0.3}	230	200	15
BOBINA 400 RINFORZATA	R249	400	200	32 ^{+0.3}	230	200	15
BOBINA 400	R295	400	200	26 ^{+0.3}	264	240	12

Rev.	Data
2	11/10/23

BOBINA PER CAVI ELETTRICI


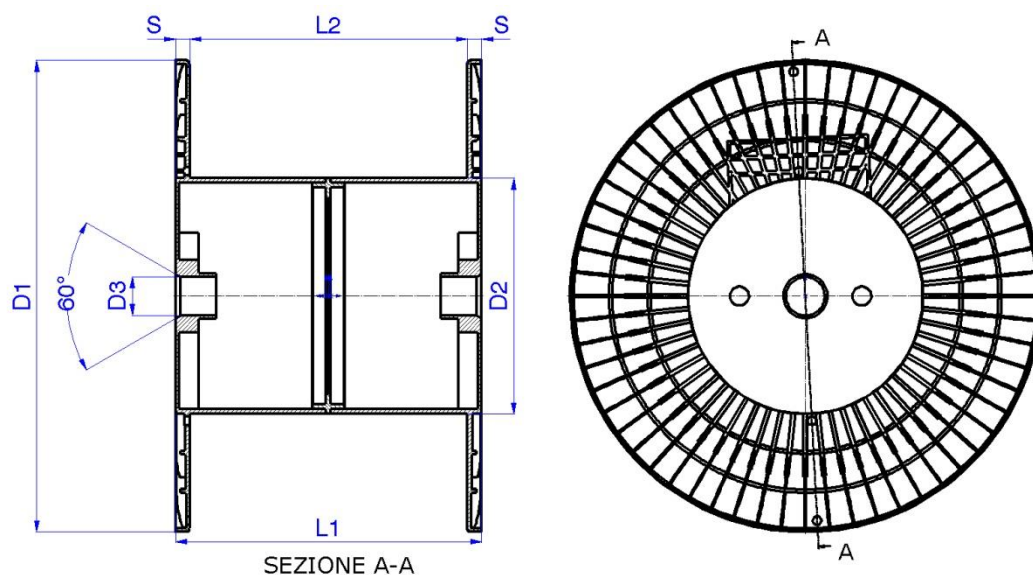


Dimensioni in mm

TIPO	COD.	D1	D2	D3	L1	L2	S
BOBINA 500	R207	500	250	41	325	295	15
BOBINA 500	R469	500	250	60	325	295	15
BOBINA 500	R470	500	250	36	325	295	15
BOBINA 500	R307	500	250	41	340	294	23

Rev.	Data
2	11/10/23

BOBINA TIPO B8

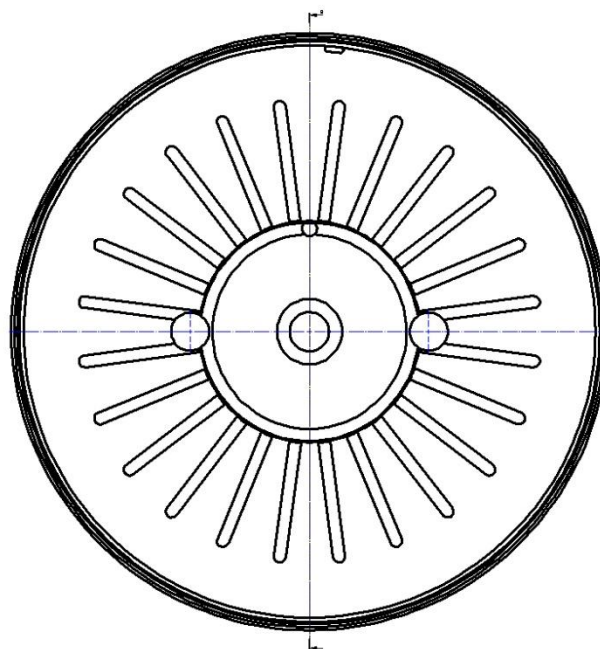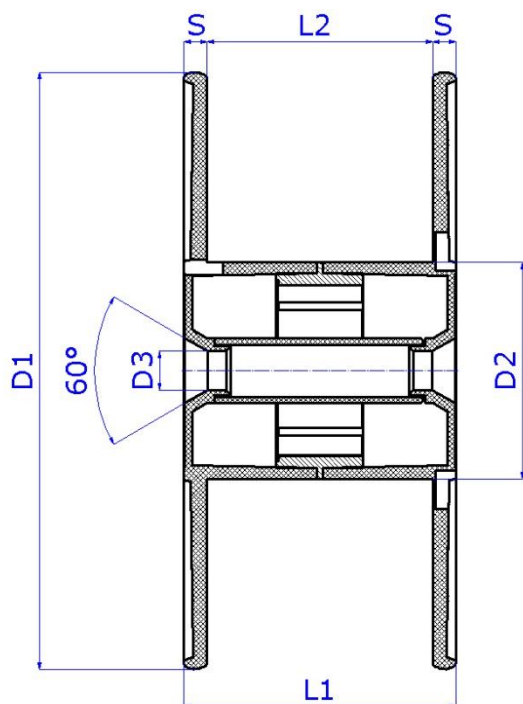


Dimensioni in mm

TIPO	COD.	D1	D2	D3	L1	L2	S
B8	R203	550	200	33	278	230	24
B8	R414	550	200	36	250	210	20

Rev.	Data
2	11/10/23

BOBINE VM

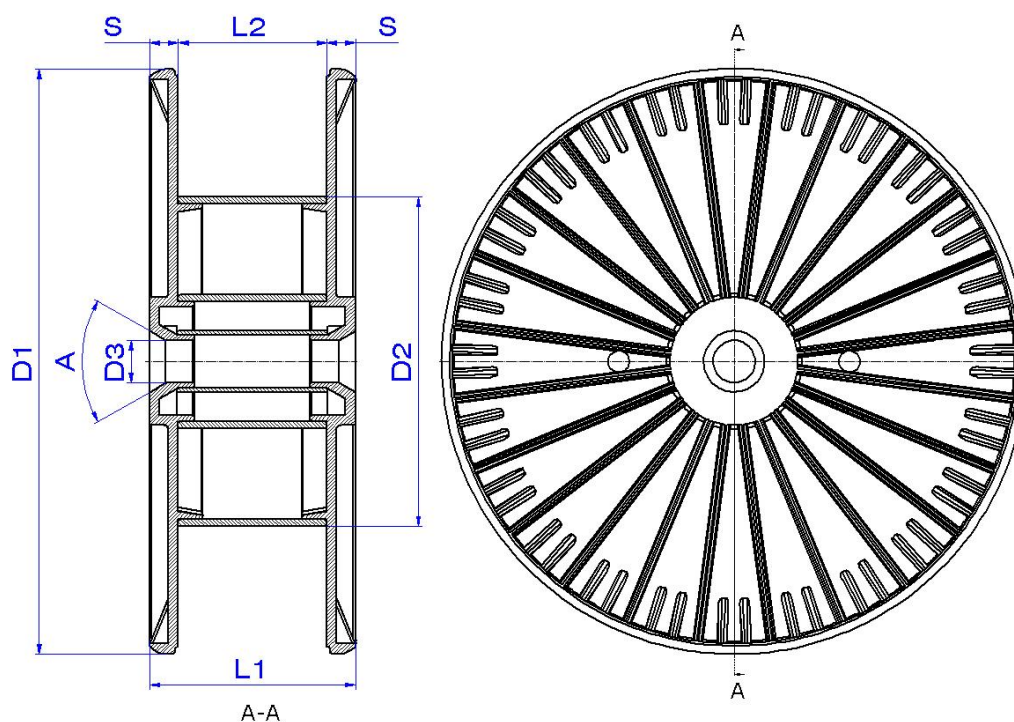


Dimensioni in mm

TIPO	D1	D2	D3	A	L1	L2	S
VM560	560	280	36/42/80/127	60°	130 - 580	80 - 530	25

Rev.	Data
2	06/12/23


BOBINA PER CAVI ELETTRICI

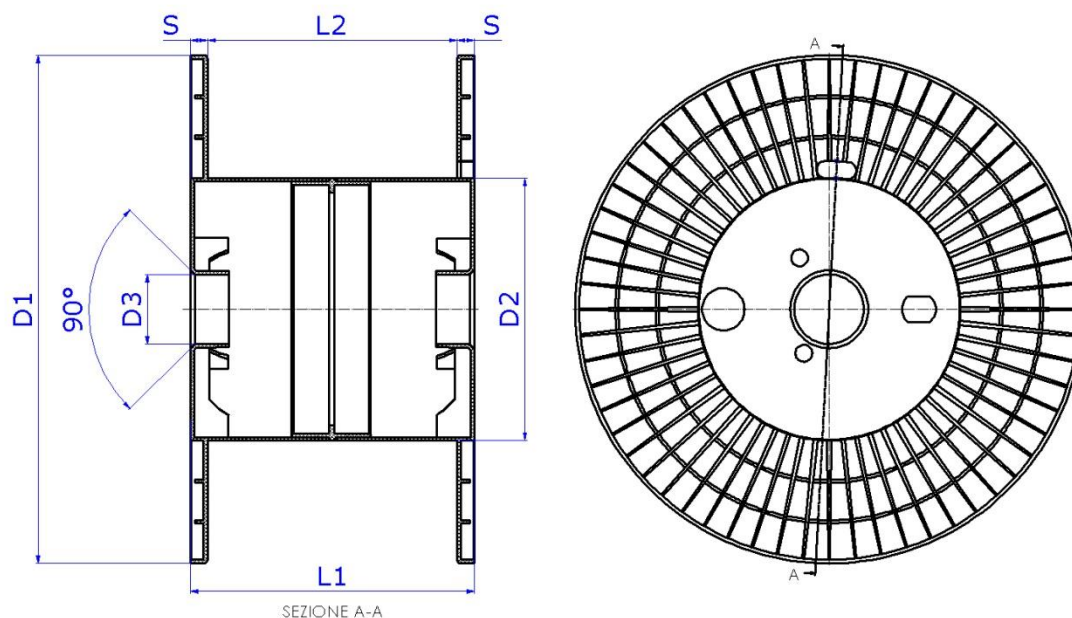

Dimensioni in mm

TIPO	COD.	D1	D2	D3	L1	L2	S
BOBINA 600	R227	600	310	82	200	160	20
BOBINA 600	R311	600	310	82	240	200	20
BOBINA 600	R223	600	310	82	290	250	20
BOBINA 600	R312	600	310	82	325	285	20
BOBINA 600	R294	600	310	82	335	295	20
BOBINA 600	R123	600	310	82	340	300	20
BOBINA 600	R235	600	310	82	355	315	20
BOBINA 600	R313	600	310	82	360	320	20
BOBINA 600	R314	600	310	82	380	340	20
BOBINA 600	R225	600	310	82	440	400	20
BOBINA 600	R226	600	310	82	510	470	20

BOBINE VM

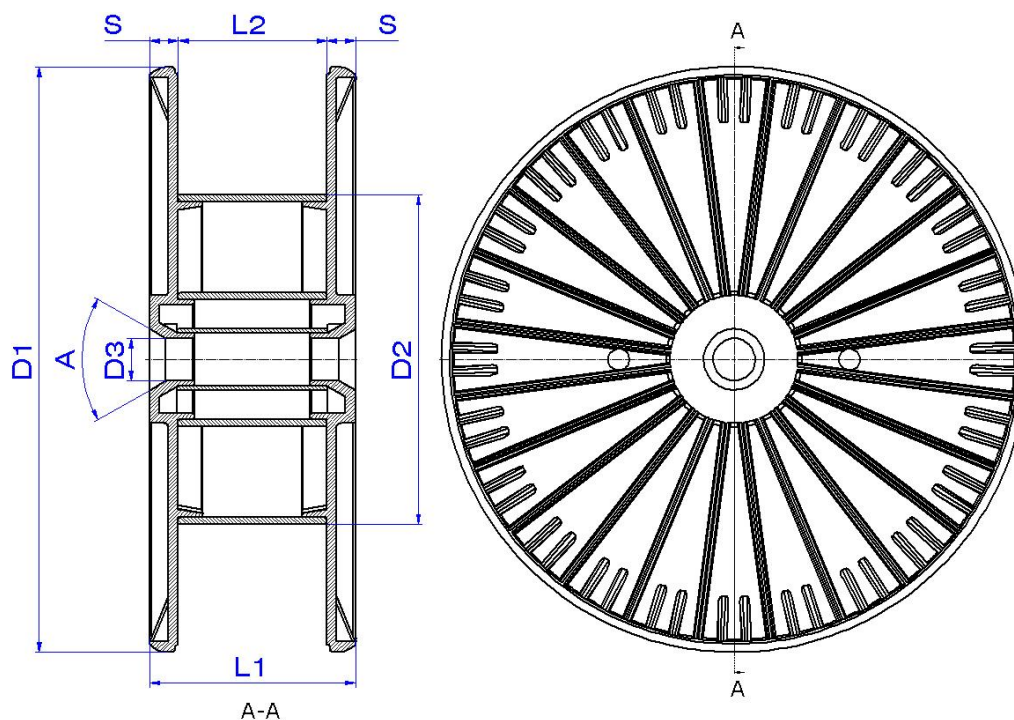


Dimensioni in mm

TIPO	D1	D2	D3	A	L1	L2	S
VM630	630	315	40/42/51/127	60°	160 - 730	110 - 680	25
VM630	630	400	127	60°	150 - 640	120 - 590	25
VM710	710	280	51/80	60°	150 - 500	80 - 430	35
VM710	710	400	51/80	60°	170 - 660	100 - 590	35
VM710	710	500	51/80	60°	190 - 480	120 - 410	35
VM710	710	280	127	45°	150 - 500	80 - 430	35
VM710	710	400	127	45°	170 - 660	100 - 590	35
VM710	710	500	127	45°	190 - 480	120 - 410	35
VM750	750	315	42/43/45/56/80/82/91/127	60°	180 - 750	110 - 680	35
VM750	750	400	42/43/45/56/80/82/91/127	60°	170 - 660	100 - 590	35
VM800	800	400	41/45/52/80/127	60°	170 - 660	100 - 590	35
VM800	800	450	41/45/52/80/127	60°	190 - 440	120 - 370	35
VM800	800	630	41/45/52/80/127	60°	150 - 630	80 - 560	35
VM1000	1000	630	45/91/127	60°	210 - 650	140 - 580	35

Rev.	Data
2	06/12/23

ROCCHETTI A TAMBURO CILINDRICO IN MATERIALE TERMOPLASTICO **NORME CEI EN 60264-2-1/A1:2004-04 ; IEC 60264-2-1/A1:2003-07**

BOBINA VM

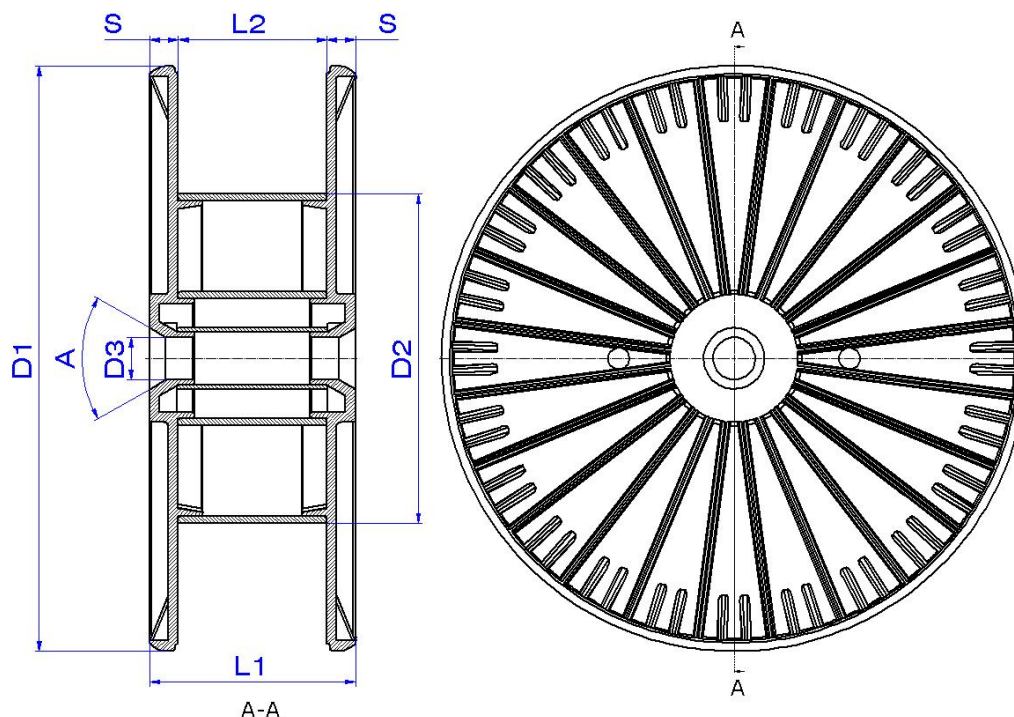

Dimensioni in mm

TIPO	D1	D2	D3	A	L1	L2	S
VM710	710	500	51	60°	250	180	35

Rev.	Data
2	06/12/23