


ROCCHETTI DI SPEDIZIONE A TAMBURO CONICO **NORME CEI EN 60264-3-1:2000-09 ; IEC 60264-3-1:1999-12**

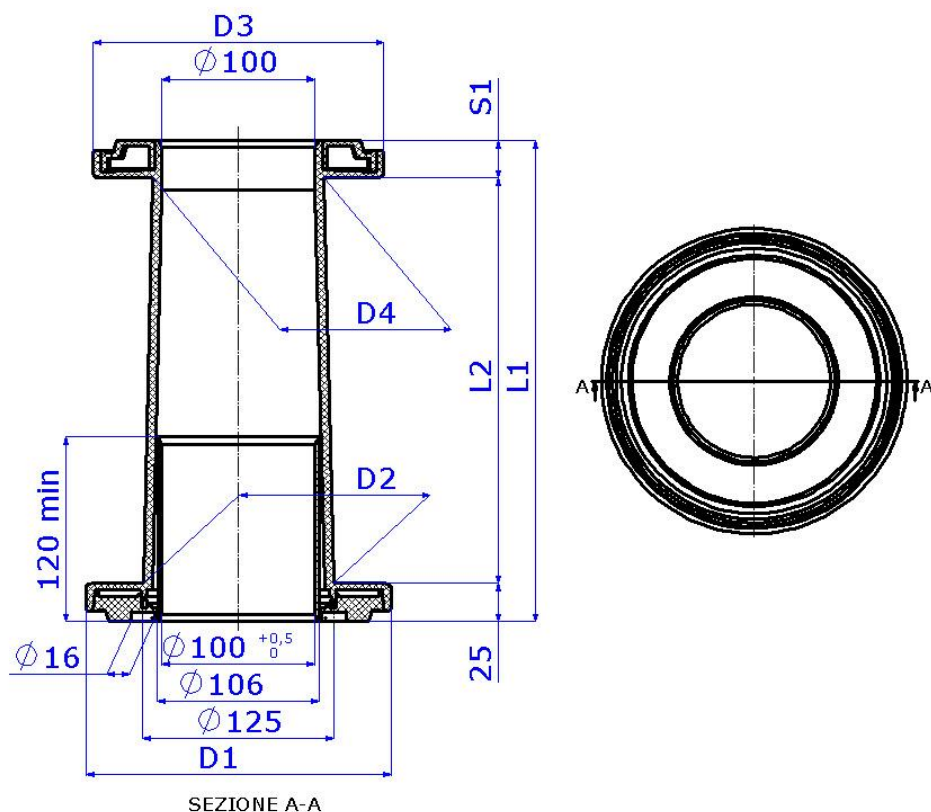


Dimensioni in mm

DIN	COD.	D1	D2	D3	D4	L1	L2	S1	TARA (g) PS,ABS
200/315	R171	200	125	190	112	315	265	25	1250 ± 1%

Rev.	Data
2	23/09/24

BOBINE CONICHE IN PLASTICA PER FILO DI RAME SMALTATO

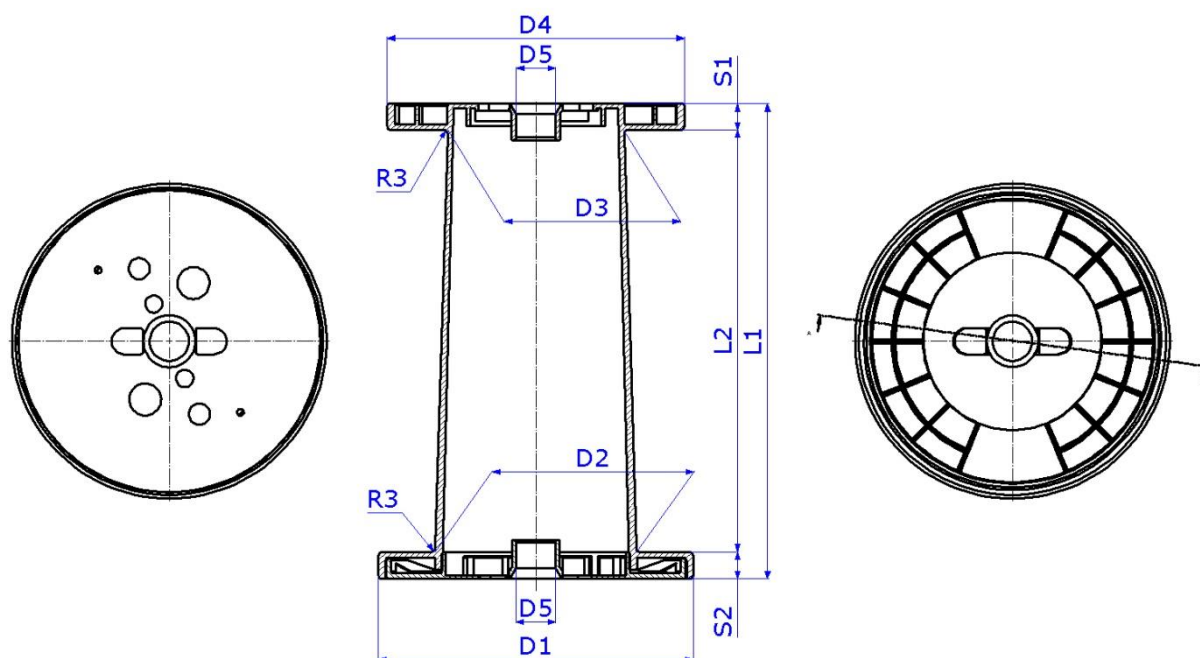


Dimensioni in mm

TIPO	COD.	D1	D2	D3	D4	D5	L1	L2	S1	S2	TARA (g) PS,ABS
DIN 250K-R	R303.31	250	160	140	235	31	377,5	335	21	21,5	2000±1%
DIN 250K-R	R303.22	250	160	140	235	22	377,5	335	21	21,5	2000±1%

Rev.	Data
2	23/09/24

BOBINE CONICHE IN PLASTICA PER FILO DI RAME SMALTATO

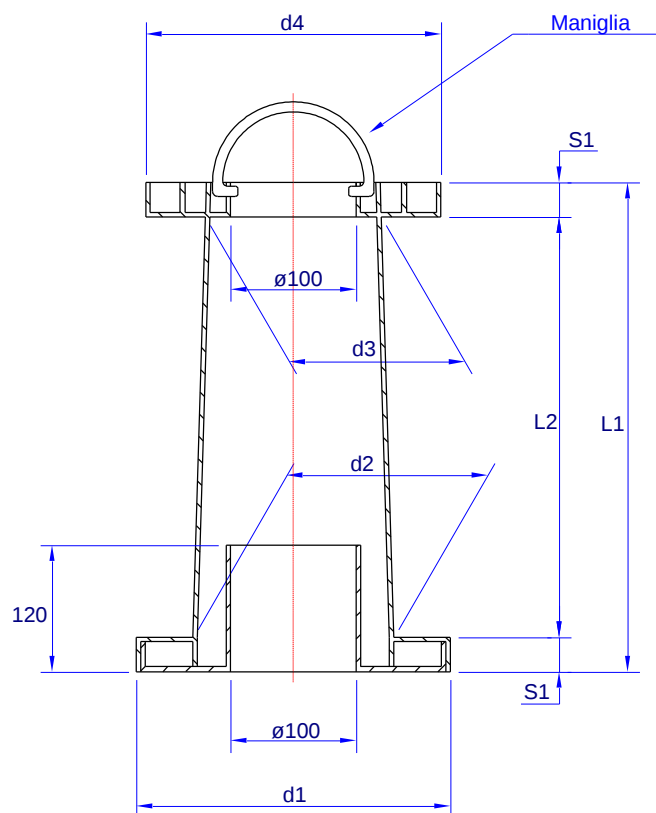


Dimensioni in mm

DIN	COD.	d1	d2	d3	d4	L1	L2	S1	TARA (g) PS,ABS
250 K	R106 - E	250	160	140	235	390	335	32,5	2000±1%

Rev.	Data
2	18/10/24

BOBINE IN PLASTICA PER FILO DI RAME SMALTATO

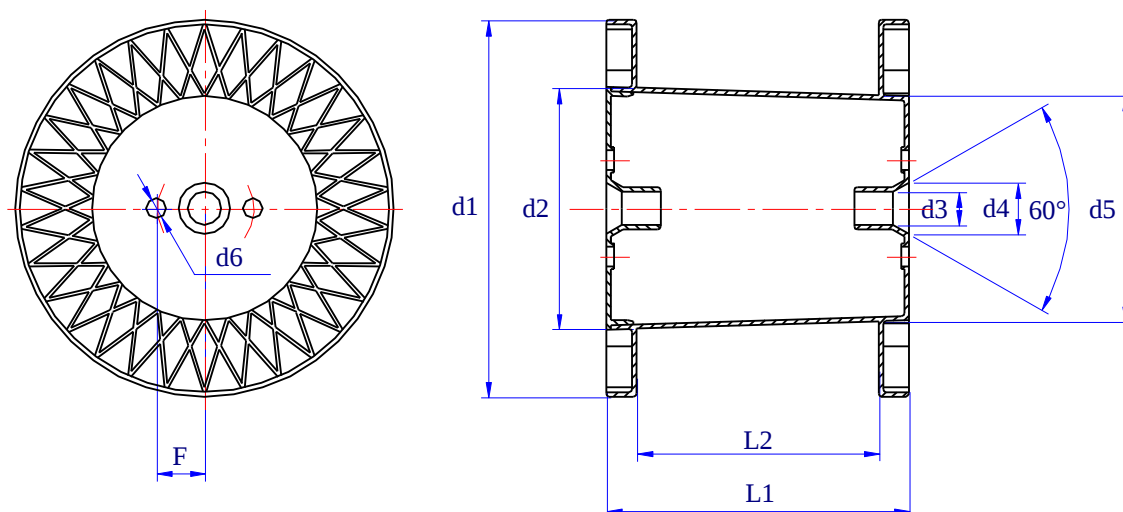


Dimensioni in mm

DIN	COD.	d1	d2	d3	d4	d5	d6	F	L1	L2	TARA (g) PS,ABS
250 Conico	R180	250	160	22	34	150	13	32	200	160	1050±2%

Rev.	Data
2	18/10/24

ROCCHETTI DI SPEDIZIONE A TAMBURO CONICO NORME CEI EN 60264-3-1:2000-09 ; IEC 60264-3-1:1999-12

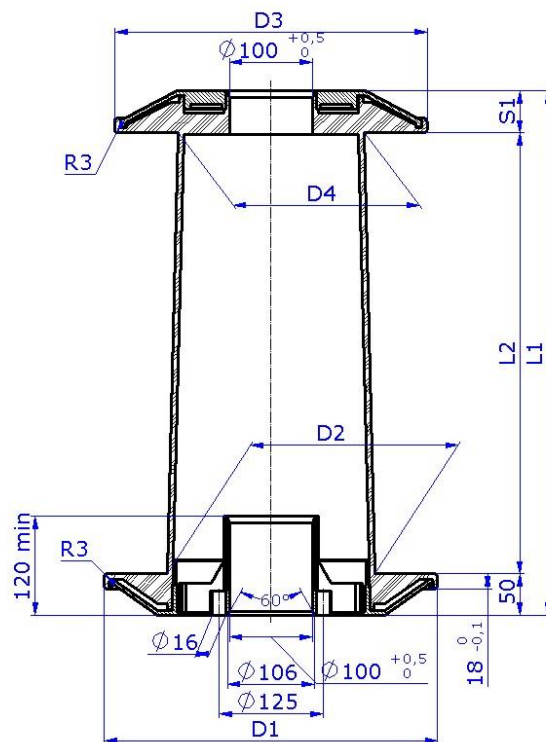


Dimensioni in mm

DIN	COD.	D1	D2	D3	D4	L1	L2	S1	TARA (g) PS,ABS
250/400	R106	250	160	236	140	400	335	32,5	2250 ± 1%
315/500	R139	315	200	300	180	500	425	37,5	4350 ± 2%
400/630	R168	400	250	375	224	630	530	50	7300 ± 2%
400/630E	R379	400	250	375	224	630	530	50	4350 ± 2%

Rev.	Data
2	18/10/24

ROCCHETTI DI SPEDIZIONE A TAMBURO CONICO NORME CEI EN 60264-3-1:2000-09 ; IEC 60264-3-1:1999-12

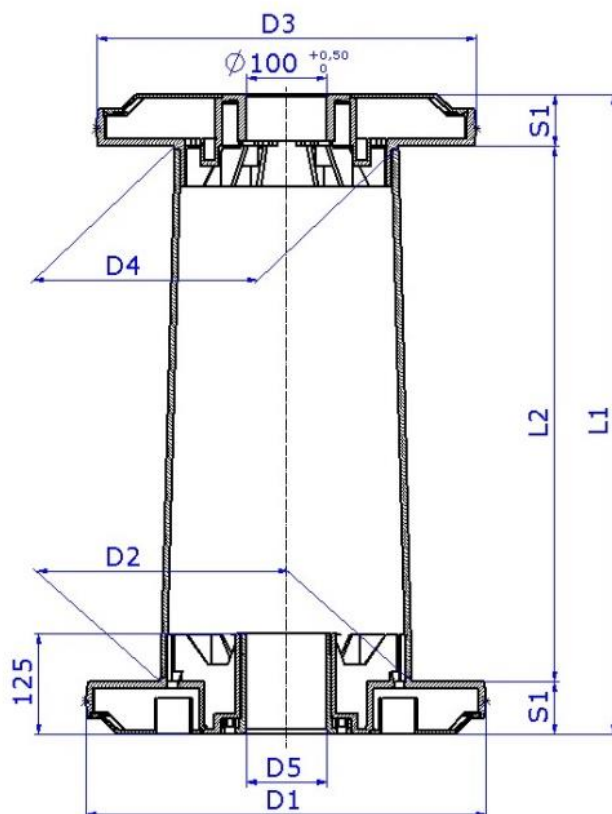

Dimensioni in mm

DIN	COD.	D1	D2	D3	D4	D5	L1	L2	S1	TARA (g) PS,ABS
500/800	R270	500	315	475	280	100	800	670	65	21000 $\pm$ 2%
500/800 IMP	R299	500	315	475	280	285	800	670	65	11500 $\pm$ 2%

Rev.	Data
1	03/04/20